

INFRARED FLASH CURE REDFLASH

High wattage and coil density heater, for greater heater surface consistency.

With the Vastex cooling fan and air curtain, Vastex flashes can be set closer to the work which increases efficiency and productivity.




NOW with digital control!

**15 YEAR
HEATER WARRANTY**



Digital percentage timer control allows for repeatable adjustments from 0-100%.



REDFLASH

18" sq Shown with Standard Stand

REDFLASH

18" x 24" Shown with SHHD-Stand



BY CERTIFICATION EXPERTS
THE NETHERLANDS

RD-18-240

18" x 18" (46 x 46cm)

2,600w @ 240v

NEMA 6-15P**

RD-18-240-HO

18" x 18" (46 x 46cm)

3,500w @ 240v

NEMA 6-20P**

Heater Size

Power (Wattage)

Power Plug

RD-1824-240

18" x 24" (46 x 61cm)

3,500w @ 240v

NEMA 6-20P**

Features

- RELIABLE** 15 Year Heater Warranty
- POWERFUL** 2600 or H.O. 3500 Watt heater (3500 standard 1824)
- USER FRIENDLY** Diagnostic pilot lights & digital heat control
- CONVENIENT** Heavy duty side handles & locking casters
- EFFICIENT** High wattage and high heater density
- FAST** Flashes plastisol in as little as 4sec
- UNIQUE** Head leveler, cooling fan and air curtains.
- THIN PROFILE** Ultra slim 2.75" (7 cm) height head

Options


- Super Heavy Duty Stand
- AutoFlash
- Rotary Table

** Domestic plugs listed. International cords available.



RedFlash_0621

INFRARED FLASH CURE ACCESSORIES

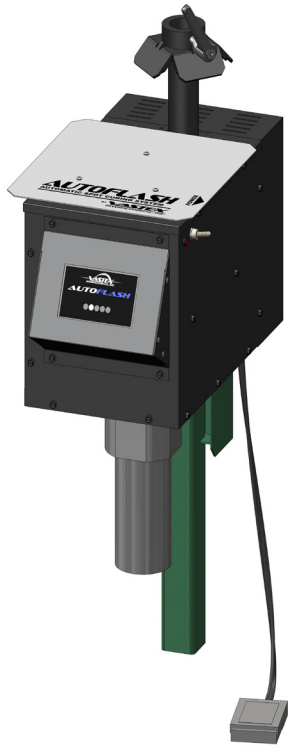


AUTOFLASH

FEATURES

- Touch Screen Display
- Selectable clockwise or counterclockwise rotation
- Smooth start and stop with eccentric arm drive
- 0 to 99 second adjustable dwell timer
- Foot pedal actuator on 7 foot cord

RedFlash shown with AutoFlash
and SHHD Stand



ROTARY TABLE

FEATURES

- Easily mounts to standard and SHHD stands
- Rotates under flash head to cure shirts
- Two sizes available for use with 18" sq and 18" x 24" flash

F-100 shown with Rotary Table



SHHD-STAND

FEATURES

- Super heavy duty stand to hold added weight
- Ideal for use with AutoFlash or heavier AirFlash
- Offset legs allow for stand to fit mostly under press













Flash Cure Units

Technical Specifications

CE	F-100	F-1000	REDFLASH		AIR-FLASH	
Models	F-100	F-1000	RD-18-240	RD-1824-240	RAD-18	RAD-1824
Heater Warranty	15 Year	15 Year	15 Year	15 Year	15 Year	15 Year
Bumper to Bumper Warranty	3 Year	3 Year	3 Year	3 Year	3 Year	3 Year
Heater Size	16" x 16" (41 x 41 cm)	18" x 18" (46 x 46 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)	18" x 18" (46 x 46 cm)	18" x 24" (46 x 61 cm)
Controls	On/Off Switch	Bi-Metal control w/ adjustment knob	Digital percentage timer	Digital percentage timer	Digital percentage timer	Digital percentage timer
Unit Warm Up Time	15 min. (120V) or 10 min. (240V)	20 min. (120V) or 10 min (240V)	6 min.	12 min.	6-10 min	6-10 min
Heater Wattage	1625 Watt Heater	1950 (120V) or 2600 (240V) Watt Heater	2600 or 3500 Watt Heater	3500 Watt Heater	3500 Watt Heater	4300 Watt Heater
Electrical Specs* / included plug (Some models require a dedicated line. 50/60 HZ for all units.)	120V/13A/1625W NEMA 5-15P 240V/6.5A/1625W NEMA 6-15-P	120V/15.6/1950W NEMA 5-20P 240V/11/2600W NEMA 6-15-P	240V/11A/2600W NEMA 6-15P 240V/16A/3500W NEMA 6-20P	240V/16A/3500W/ NEMA 6-20P Plug	240V/16A/3500W NEMA 6-20P	240V/19A/4300W/ NEMA L6-30P
Electrical Specs - AutoFlash / included plug	110-125V/1A/NEMA 5-15P 220-240V/1A/NEMA 6-15P					

Shipping Weights and Dimensions

	Weight**	Dimensions**
F-100 (Head and Stand)	39 lbs (18 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
F-1000 (Head and Stand)	42 lbs (19 kg)	23" x 28" x 9" (58 x 71 x 22.9 cm)
R-18-240 (Head Only)	35 lbs (16 kg)	26" x 29" x 7" (66 x 74 x 18 cm)
R-1824-240 (Head Only)	43 lbs (19.5 kg)	26" x 35" x 8" (66 x 90 x 20 cm)
RA-18-HO (Head Only)	64 lbs (29 kg)	29" x 26" x 15" (74 x 66 x 38 cm)
RA-1824 (Head Only)	74 lbs (35.5 kg)	35" x 29" x 15" (89 x 74 x 38 cm)
AF-120/AF-240 AutoFlash kit	51 lbs (25 kg)	31" x 22" x 14" (79 x 56 x 36 cm)
SH-STAND-WS Standard Stand for Manual Flash	22 lbs (10 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND-M Heavy Duty Stand for Manual Flash	42 lbs (19kg)	30" x 14" x 7" (76 x 35.5 x 18 cm)
SH-LEGS-AF Standard Stand for AutoFlash	15 lbs (7 kg)	37" x 7" x 3" (94 x 18 x 8 cm)
SHHD-STAND Heavy Duty Stand for AutoFlash	39 lbs (18 kg)	30" x 15" x 11" (76 x 38 x 28 cm)

NORTH AMERICAN POWER PLUG CONFIGURATION	
RECEPTACLE	PLUG
 NEMA 5-15R	 NEMA 5-15P
 NEMA 5-20R	 NEMA 5-20P
 NEMA 6-15R	 NEMA 6-15P
 NEMA 6-20R	 NEMA 6-20P
 NEMA 6-30LR	 NEMA 6-30LP

1 in = 2.54 cm
1 lb = 0.454 kg

*If extension cord is required, consult a licensed electrician.

**All shipping weights and dimensions are for continental US shipping only. Call for other shipping specifications.

